

B110C

Ultra Durable

- Higher heat resistance up to 150°C
- Good chemical and solvent resistance
- High resolution for 300 600 dpi printer
- Applicable to a wide range of synthetic materials: PET/PP/PE/PVC films...
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head

PRINTING PROPERTIES

Maximum printing speed 4 IPS

- For the characters: 1.0mm

Resin . Flat head

	Non coated paper	Top-coated paper	PET	PE	PP	PVC
Compatibility	×	×	Ś	\checkmark	\checkmark	$\overline{\mathbb{A}}$
Image density	-	-	1.53	1.57	1.57	1.46

Note: Smoothness Bekk for paper family must be over 2000s.

Image resolution for paper & film:

Minimum size: - For the lines: 0.1mm

RIBBON PROPERTIES

- Total ribbon thickness: < 9 μ m
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.045

- Ink melting point: 83°C
- Tearing resistance: > 200N/mm²
- Transmission density: 1.00 mini







Heat resistance

CERTIFICATES




GENERAL CONDITION


Usage conditions: 5 to 35°C at 30 to 85% of relative humidity. Storage conditions: Keep indoor avoiding high temperature, high humidity, direct sunlight. Storage life: 24 months after slitting day.

RICOH imagine. change.

PRINTED IMAGE DURABILITY

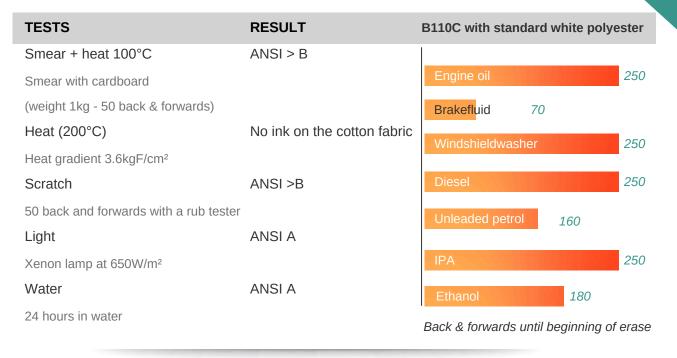

B110C DURABILITY

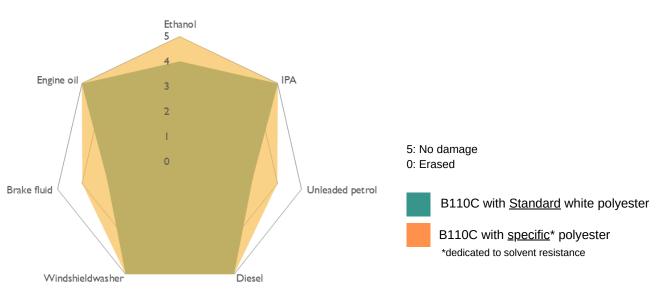

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

IMS DIVISION

RICOH (THAILAND) LTD

341 Onnuj Road, Prawet, Prawet, Bangkok 10250, Thailand Tel: 02-088-8888

Email: RTHIMS@Ricoh.co.th

Website: www.ricoh.co.th

