



# B110W

Economical

- Excellent label adaptivity
- Higher printing clarity
- Super cost saving

## PRINTING PROPERTIES

	Rough Paper	Coated Paper	Thermal Transfer Paper	Gloss Paper
Compatibility			Partial	Partial

## RIBBON PROPERTIES

- Polyester film
- Total ribbon thickness: 6.7-7.2 µm
- Ink melting point: 85°C

## IMAGE PROPERTIES

- Image density : 1.1 or more\*
- Resolution : ANSI C or more\*

\*RICOH standard test method

## Application



Tags



Logistic/Storage  
Shipping



Retail



Multi purpose  
label


## GENERAL CONDITION

Storage conditions: Keep in-door, avoiding high temperature (such as beside heat source), high humidity and direct sun light.

Usage environment : 5- 35°C, 30-85% RH

Guarantee period: 1 year after delivery

## B110W QUALIFICATIONS

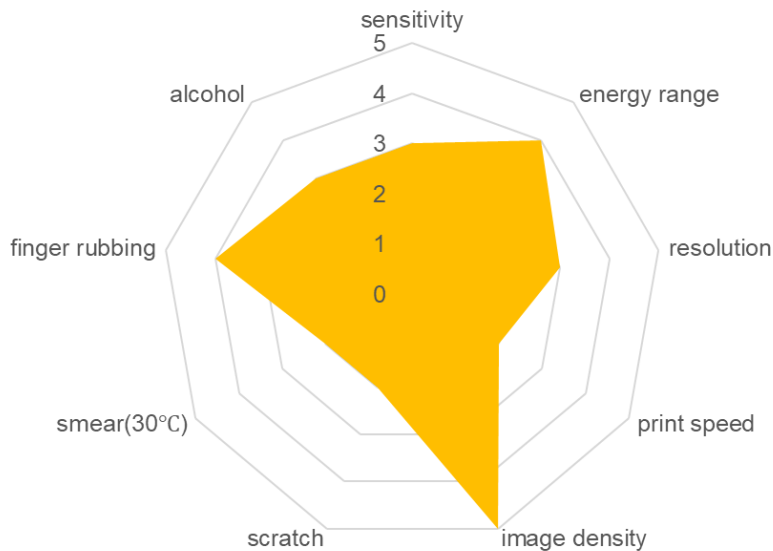

*These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)  
Please check its matching before using*

### IMS DIVISION

#### RICOH (THAILAND) LTD

341 Onnuj Road, Prawet, Prawet, Bangkok 10250, Thailand

Tel: 02-088-8888

Email: RTHIMS@Ricoh.co.th Website: www.ricoh.co.th

\* Specifications are subjected to change without notice.

\* The color(s) of the actual product may vary from the color(s) shown in this datasheet



Scan to visit product's page