

B115A

Multipurpose

Wax-Resin • Flat head

- High sensitivity
- Scratch resistance
- High resolution
- Applicable to a wide range of receiving materials

PRINTING PROPERTIES

	Top-coated paper	Gloss coated paper	Synthetic paper	PET
Compatibility				

Note: Smoothness Bekk for paper family must be over 200s.

RIBBON PROPERTIES

- Polyester film thickness: 4.5 μm
- Friction coefficient: < 0.035
- Tearing resistance: > 200N/mm²
- Transmission density: 1.20 mini

CERTIFICATES/ COMPLIANCE



Application



Tags



Ticket



Logistic/Storage
Shipping



Healthcare



Asset label
signage



Scan to visit product page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoors avoiding high temperature, high humidity, and direct sunlight.


Storage life: 24 months after production.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS	RESULT
Scratch resistance 50 back and forwards with a rub tester	ANSI 4.0A
Heat (40°C)	ANSI 4.0
Finger rub resistance	ANSI 3.5A

B115A CHARACTERISTICS

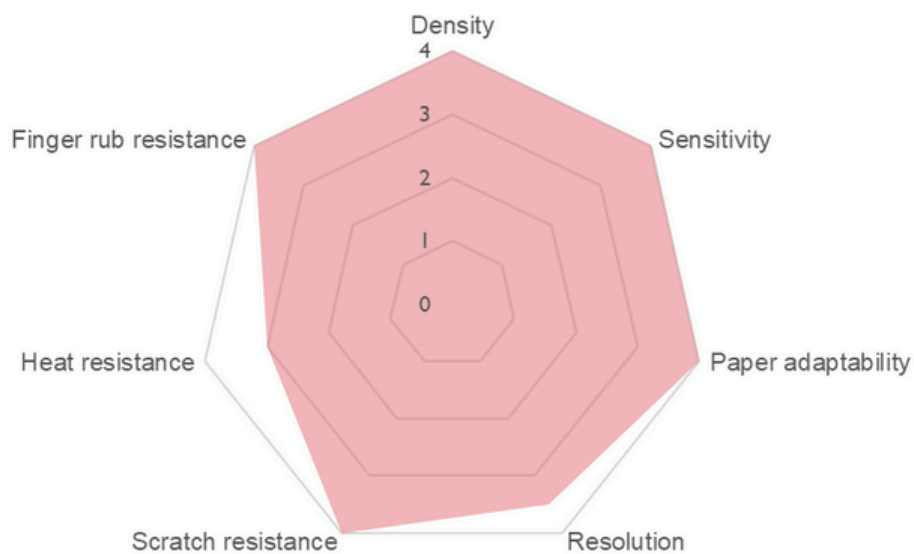

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

IMS DIVISION

RICOH (THAILAND) LTD

341 Onnuj Road, Prawet, Prawet, Bangkok 10250, Thailand

Tel: 02-088-8888

Email: RTHIMS@Ricoh.co.th Website: www.ricoh.co.th

** Specifications are subjected to change without notice.*

** The color(s) of the actual product may vary from the color(s) shown in this datasheet*



Scan to visit product's page